

ARIZON

NEXUS SERIES

Pure Sine Wave High-frequency Inverter Charger

NX-WAVEPLUS3000



Stable

- Advanced SPWM modulation technology with pure sine wave output and high power quality.

- High power density and long life devices are selected to support long term operation at full power.

Efficiency

- High conversion efficiency, low losses and low harmonic distortion rate.

Intelligent

- Bluetooth as standard, supports mobile phone app to view device operating parameters.



- Utility bypass output, inverter output automatic uninterrupted switching power supply

Safety

- With battery over-voltage and over-discharge protection, output overload and short-circuit protection and over-temperature protection.

- Surge protection design is suitable for lithium battery power systems.

- Equipped with AC output RCD earth leakage protection switch

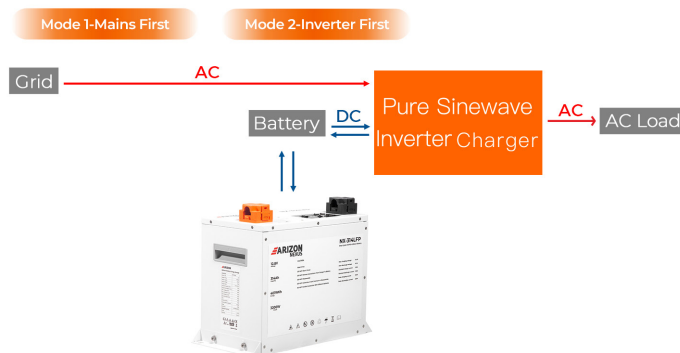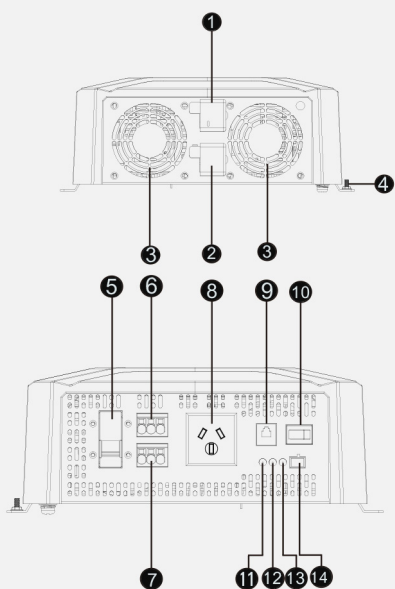

Main

Items	NX-WAVEPLUS3000
Inverter Output	
Rated output power	3,000W
Peak power	6,000W
Rated output voltage	220/230 (default) /240VAC (±2%)
Output Frequency	50/60Hz
Output Waveform	pure sine wave
THDV	THDV<4% (resistive load)
Power Factor	1
Rated Output Efficiency	>87%
Max. Output Efficiency	>93.5%
No-load loss	< 20W
Battery	
Rated battery voltage	12VDC
Battery voltage range	10.8~15.5VDC
Rated Charging Current	200A
AC Input	
AC Input Voltage	180~265VAC (Single-Phase)
AC Input Frequency	45~65Hz
Rated Input Current	16A
General	
Dimensions	400*300*116mm
Weight	8.7kg
Noise	≤60dB
Cooling Method	Neutral Cooling+ Intelligent Fan
Protection Degree	IP20
Ambient Temperature	-20°C~60°C
Certification	CE、ROHS、IEC62109-1/2、EN61000-6-1/3、IEC60335-1/2-29

Port

No	Port	No	Port
1	Battery positive terminal	9	RS485 port
2	Battery negative terminal	10	Workmode switch
3	Cooling fan	11	Inverter indicator light
4	Grounding terminal	12	Charging light
5	Output AC RCD leakage protection switch	13	Fault indicator
6	AC input port	14	External switch terminal
7	AC output port 1		
8	AC output port 2		